

(19) World Intellectual Property
Organization
International Bureau



10 JAN 2005



(43) International Publication Date
22 January 2004 (22.01.2004)

PCT

(10) International Publication Number
WO 2004/007112 A1

(51) International Patent Classification⁷: B22D 11/06,
11/128

(21) International Application Number:
PCT/EP2003/007301

(22) International Filing Date: 8 July 2003 (08.07.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
MI2002A001509 10 July 2002 (10.07.2002) IT

(71) Applicant (for all designated States except US): DANIELI
& C. OFFICINE MECCANICHE S.P.A. [IT/IT]; Via
Nazionale, 41, I-33042 Buttrio (IT).

[IT/IT]; Via G. Paolini, 29, I-34070 Fogliano Redipuglia
(IT). DE LUCA, Andrea [IT/IT]; Via Malignani, 13/6,
I-33047 Remanzacco (IT). KAPAJ, Nuredin [AL/IT]; Via
Caprera, 7, I-33100 Udine (IT). FAGGIANI, Edi [IT/IT];
Piazzale Cavedalis, 6/2, I-33100 Udine (IT).

(74) Agent: GERVASI, Gemma; Notarbartolo & Gervasi
S.p.A., Corso di Porta Vittoria, 9, I-20122 Milano (IT).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC,
SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA,
UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

(72) Inventors; and

(75) Inventors/Applicants (for US only): POLONI, Alfredo

[Continued on next page]

(54) Title: CONTINUOUS CASTING PLANT WITH A DEFLECTING DEVICE FOR METALLIC STRIPS AND DEFLECTING METHOD

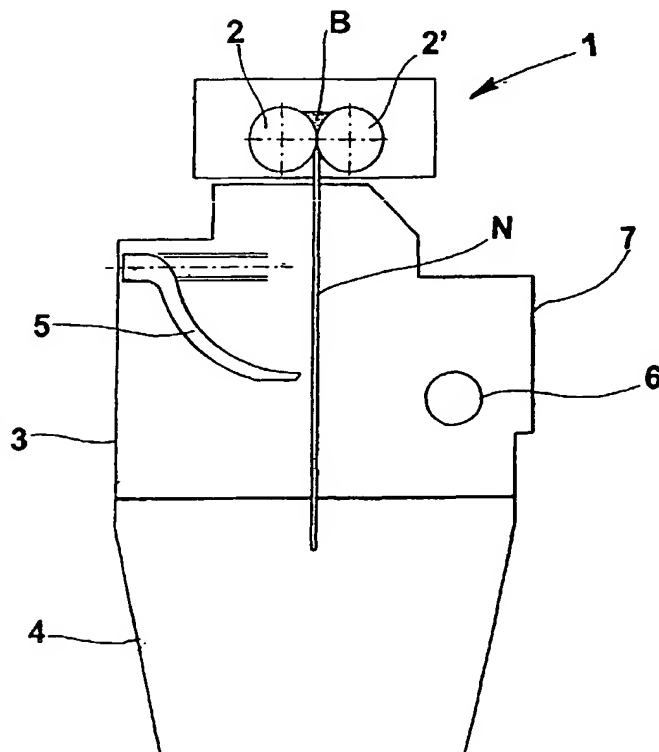

(57) Abstract: A metallic strip mobile deflecting flap (5) of a metallic strip continuous casting plant is placed below the counter rotating roll ingot mould and deflects the initial section of the strip sending it horizontally towards the transport rolls (6). The device passes from a standby position, wherein it does not interfere with said metallic strip (N), and a position of interference with the metallic strip (N), wherein it deflects the strip in a horizontal direction. A method for deflecting the strip produced by continuous casting to a guided rolling pathway is also described.

WO 2004/007112 A1



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

Declaration under Rule 4.17:

- of inventorship (Rule 4.17(iv)) for US only

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

CONTINUOUS CASTING PLANT WITH A DEFLECTING DEVICE FOR METALLIC STRIPS AND DEFLECTING METHOD

Field of the invention

The present invention refers to a continuous casting plant with a deflecting device
5 for deflecting a metallic strip produced by continuous casting originating from the ingot mould of the plant. The device is placed at the entrance of continuous transporters to send the strand to various stations including the casting line downstream of the ingot mould. A method for deflecting the strip is also described.

State of the art

10 One of the technologies for the production of metallic strips consists in producing them starting from continuously cast ingots or slabs, which are successively reduced in thickness by a series of operations comprising breakdown, hot and cold rolling, together with further processing, for example thermal treatment.

To improve the strip production process solutions have been proposed such as the
15 casting of the molten metal into the space existing between two cooled counter rotating parallel rolls, by regulating the distance of which it is possible to obtain strips of the desired thickness. The metallic strip descends from the ingot mould initially following a path from above towards below and is sent, deviating and sending it with guided rolling pathways or other transport devices, to the
20 downstream working stations.

Emerging from the counter rotating rolls, the cast strip initially follows, a vertical stretch; The rolling transporters downstream of the ingot mould generally follow trajectories which continue horizontally or along inclined planes.

A problem which emerges with this type of plant, for example at the start or after
25 breakdowns in casting, is the necessity to deviate and position an interrupted flap, or the cast head, of the metallic strip, when it descends vertically from the ingot mould, and deviate it towards the first transportation means – by means of rolls or of a similar type - immediately below the ingot mould with a horizontal direction of advancement, so as it can be seized and loaded by the transporter and sent to the
30 successive working or manipulation stations.

A solution for deviating the casting head from its vertical trajectory is that described for example in the patent WO 0061320: whereby an accurately shaped

plate, hinged at one of its ends, turning around an axis parallel to the plane formed by the strip and transversally to the direction of advancement of the strip, raises and brings the free flap of cast strip to the entry of the rolling plane downstream of the ingot mould. After a sufficiently long stretch the strip is deposited onto the rolling plane, it is gripped by holding rolls and can move towards the downstream stations. Frequently in continuous casting plants, below the ingot mould there is placed a large container (called wastes chest) into which the wastes, or the metal strip cast ends which are detached from the rest of the casting, are made to fall a little after exit from the ingot mould; for example, they can deal with the initial casting tracts emerging from the ingot mould immediately after starting following a stoppage of the plant. In fact, these initial portions can have mechanical characteristics not corresponding to the casting specifications.

A problem at the heart of the present invention is to supply a continuous casting plant fitted with a device for the deflection of the metallic strips produced by continuous casting, which is reliable and adapts to the various types of continuous casting machines existing for the production of metallic strips, and which causes minimum hindrance in the area underneath the casting rolls.

Summary of the invention

According to an aspect of the present invention, such problems are solved by a continuous metallic strip casting plant, comprising:

- an ingot mould, comprising in turn a pair of counter rotating rolls, able to continuously cast a metallic strip along a vertical casting direction;
- transporting means for the metallic strips, located downstream of said direction of casting, able to transfer the cast metallic strip to the following processing stations;
- a mobile deflection device, located below said counter rotating rolls and able to deflect an initial portion of said strip directing it towards the transportation means and in addition able to pass from a standby position, in which it does not interfere with said metallic strip, to an operating position interfering with the metallic strip, in which it deflects said strip initial part from the vertical casting direction, characterised by the fact that there are provide motorised means to translate said mobile deflection device into a substantially horizontal direction from said standby position to said interfering operating position.

According to an additional aspect the invention relates to a method for continuous casting of a metallic strip by means of a plant with the features above, comprising the following operations:

- 5 - Casting an initial portion of metallic strip of a predetermined length in a vertical direction by means of counter rotating rolls ingot mould;
- placing of said deflecting device in a position of interference with respect to the direction of strip casting;
- translating horizontally said deflection device in a direction such as to bend the advancing trajectory of said initial portion of the strip and making it assume a
- 10 substantially horizontal moving direction, when the strip foremost end starts resting on the surface of said deflection device and deviates from said substantially vertical path;
- bringing the foremost end of the strip, through further movement of said deflection device, closer to holding and/or drawing devices to grip the initial
- 15 extremity of the strip and draw it towards predefined processing stations;
- Translating said deflection device in a horizontal direction away from the strip.

The deflecting device as above can be advantageously a mobile plate or flap of appropriate shape, supplied with appropriate moving means as described above.

List of the figures

- 20 Further advantages of the present invention will become apparent, to the skilled person, from the following detailed description of an embodiment described with reference to the following figures by way of non-limiting example, whereby:

Figure 1 shows schematically an example of a preferred embodiment of a device according to the present invention, in a first standby position of the operating

25 sequence;

Figure 2 shows schematically the device of Figure 1 in a second position of the operating sequence;

Figure 3 shows schematically the device of Figure 1 in a third position of the operating sequence;

- 30 Figure 4 shows schematically the device of Figure 2 in a fourth position of the operating sequence.

Detailed description of a preferred embodiment

Figures 1-4 show schematically four successive stages in the operating sequence of a plant according to a preferred aspect of the invention.

The continuous metallic strip casting plant of Figure 1 comprises an ingot mould 1 which comprises in turn a pair of rolls 2, 2', named also "counter rotating rolls" in the following description. The rolls 2, 2' rotate around two axes parallel to each other in opposite rotating directions, the left roll in a clockwise direction and that on the right in anticlockwise direction with reference to the orientation in the figures. The rolls 2, 2' are distanced apart so as to be separated at their point of minimal distance, by a slot through which the molten metal bath B exits downwards, cooling it and forming with a continuous casting operation the metallic strip N.

~~Reference 3 indicates a chamber filled preferably with inert gasses, to create a~~ controlled atmosphere which avoids oxidation of the metal. The metallic strip N is immersed in this chamber from its formation, on exit from the ingot mould. Underneath the inert chamber 3 there is placed a chest 4 for wastes inside which crop ends of the strip N are let fall when they are cut immediately - or almost immediately - downstream of the ingot mould 1, as can be seen in more detail in the following. The wastes chest 4 receives also the melt still remaining in the ingot mould when the casting operation, for any reason, must be suspended or interrupted, by reciprocal distancing of the counter rotating rolls 2, 2'.

The inert chamber 3 has a side 7 from which the strip N emerges, continuously cast by the plant. Here are various strip processing devices which comprise guide rolls, schematically represented by a single cylinder 6, onto which the strip rests drawn by appropriate devices.

Figure 2 is a stage of the cast operation in the plant of Figure 1, in which a crop end 10 of metallic strip N has been sliced - or however detached by an appropriate device - from the remainder of the strand N. Means for drawing the strip consists in varying shortly the speed of rotation of the rolls 2 in such a way to produce a thinning of the strip N immediately upon exit from the pair of rolls 2, so that the latter tears under its own weight, or the strip can be sliced by other known mechanical devices or other casting procedures.

This cutting operation is for example necessary upon starting the casting operation, or following an interruption of the casting operation for any reason, to

eliminate the initial section of the new strand if this does not have the desired mechanical characteristics, as it often happens,.

The torn crop end 10 can fall by gravity into the underlying wastes chest 3.

The mobile plate 5 is equipped with motorised means, as for example a hydraulic
5 cylinder, able to impart a translational movement in a substantially horizontal direction to the plate bringing it in interference with the strip N, and deviating the latter from its vertical trajectory under the ingot mould 1. It brings the foremost end E into a position where it can be laid onto conveying means schematically represented by the roll 6, which in practice could be realised by a roll conveyor.

10 The conveying means 6 can also comprise means for drawing the strip N towards the other processing stations, for example the rolling, cooling, winding and cutting stations. Such means can be one or more pairs of drawing rolls. Initially, however the strip N is pushed forwards by the rotation of the casting rolls 2 and 2', whilst not being engaged by such means.

15 The mobile plate or flap 5 has preferably an appropriately arched shape so as to gradually deviate the strip N from an almost vertical direction to the substantially horizontal direction on the rolling pathway 6. In the outlined example, the mobile flap 5 for most of its upper surface corresponds to the surface of a circular cylinder. According to an important aspect of the present invention, the mobile flap
20 5 can be made to interfere with the cast strip N, to deflect it, with a purely translation movement. Preferably, but not necessarily, the translation movement occurs according to a substantially horizontal rectilinear trajectory.

Especially at high casting speeds, it is possible that the contact between the strip and the flap takes place before the flap reaches the maximum position of
25 interference (represented in figure 3). A sheer translation movement, especially if horizontal, has the further advantage of reducing the relative frictional velocity between the strip and the flap, in the phase when the movement of the flap occurs towards the position of maximal interference.

Figure 3 shows the mobile flap 5 upon reaching the end position of its operational
30 course: It is in a position such that the foremost area of the cast strip N has a curvature, obtained by a gradual displacement of the deflector. The strip N at this stage is deviated from the initial line of vertical movement, or from the axis of

casting, in a progressive manner. The leading edge 9 of the flap is found at a height such that the strip N passes from the edge 9 to the roll conveyor 6 without violent or however dangerous curvatures.

When a sufficient portion of strip N rests on the conveyor, represented by the roll
5 6, and is held by appropriate drawing means of known type, not represented, the mobile flap 5 can be withdrawn and again translated towards its final standby position, towards the left of Fig. 4, since the strip N no longer requires any support in the area underneath the counter rotating rolls 2, 2'.

The above embodiment can be subject to various changes without exiting from the
10 scope of protection of the present invention: for example the mobile flap 5 can move from the standby end position to the operative end position by moving along a route not necessarily rectilinear but alternatively curved, or along a rectilinear route not horizontally but inclined, where for example the position of the standby end position is located higher than the position than the operative end point, and
15 the flap approaches the casting strip with a downward movement.

CLAIMS

- 1) Continuous metallic strip casting plant, comprising:
 - an ingot mould (1), having a pair of counter rotating rolls (2,2'), adapted to continuously cast a metallic strip (N) along a vertical casting direction;
 - 5 - conveying means (6) of said metallic strip, located downstream of said casting direction, adapted to transfer the metallic strip to following processing stations;
 - a mobile deflecting device (5), located lower than said counter rotating rolls and able to deflect an initial portion of the metallic strip deviating it towards said
 - 10 conveying means (6) and, in addition, adapted to pass from a standby position, of not interference with said metallic strip (N), to an operative position of interference with said metallic strip (N), whereby it deflects the initial portion of the strip from the vertical casting direction, characterised by the fact that there are provided motor means for translating said mobile deflecting device (5) in a
 - 15 substantially horizontal direction from the standby position to the operative position of interference.
- 2) The plant according to claim 1, wherein the translation movement of said deflecting device (5) occurs along a rectilinear trajectory.
- 3) The plant according to claim 1, wherein said deflector device (5) provides a
- 20 rounded edge (8) in the foremost part with respect to the casting plane.
- 4) A method for continuous metallic strip casting by means of a plant according to one or more of the preceding claims, comprising the following operations:
 - casting of an initial portion of metallic strip of predetermined length in a vertical direction through an ingot mould (1) with counter rotating rolls (2, 2');
 - 25 - placing said deflecting device in a interference position with the vertical strip casting direction.
 - when the leading edge of the strip begins to rest upon the surfaces of the deflecting device (5) and to deviate from said substantially vertical path of advancement, making the deflecting device (5) to translate in a horizontal
 - 30 direction such as to deviate the advancing path of the initial strip portion and make it assume a substantially horizontal moving direction;
 - approaching the strip leading edge, through further translation of said

- deflecting device (5), towards holding and/or drawing devices to grip the front edge of the strip and draw it towards predetermined processing stations;
- translating in a horizontal direction said deflecting device (5) in a direction of its removal from the strip.

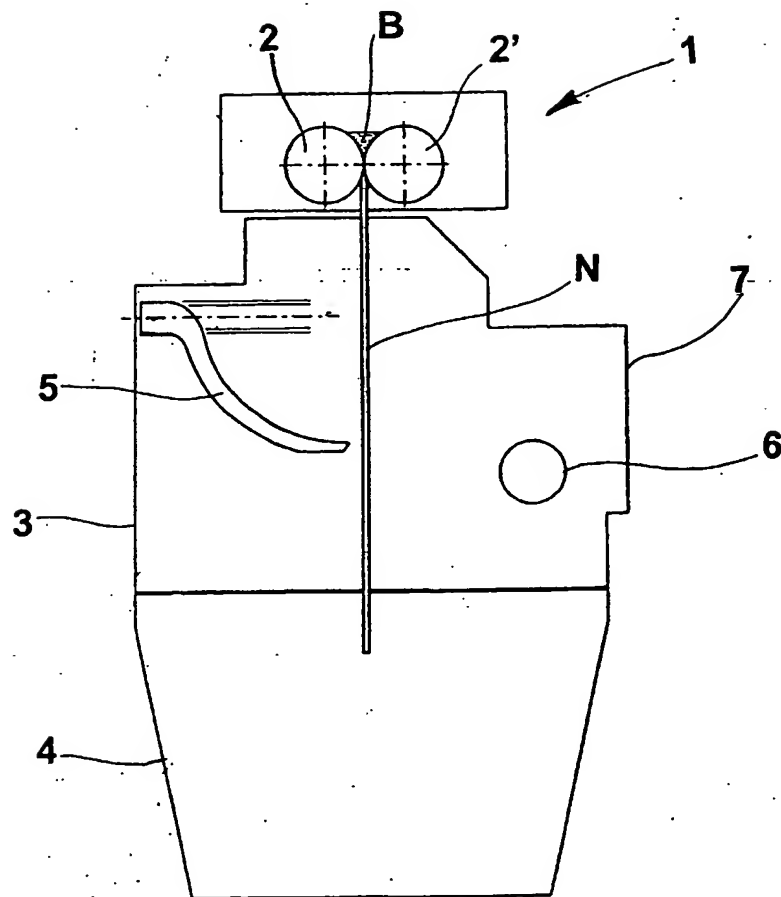


Fig. 1

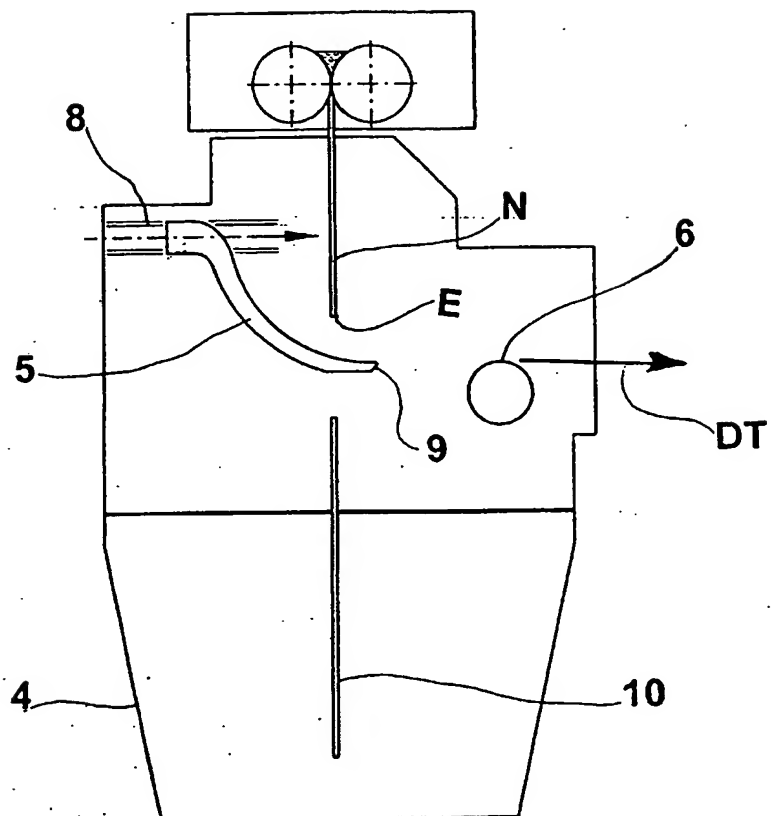


Fig. 2

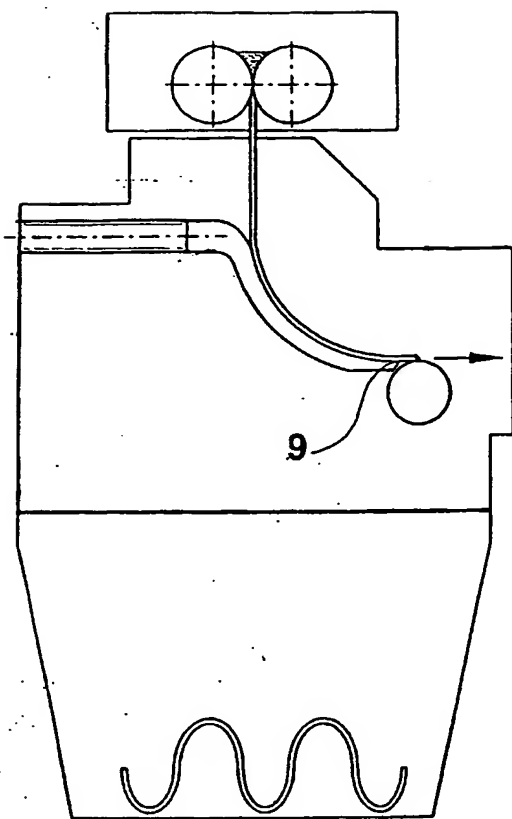


Fig. 3

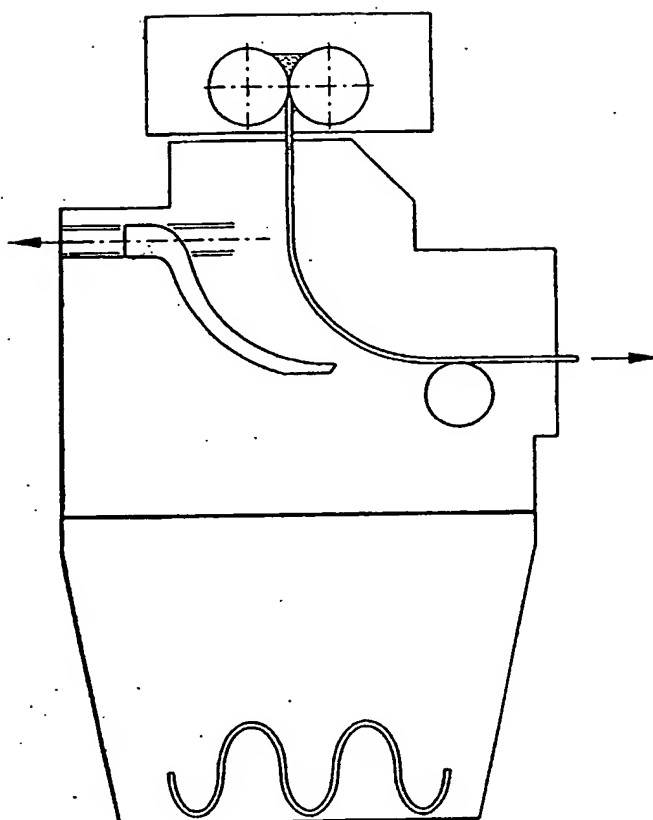


Fig. 4

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/EP 03/07301

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B22D11/06 B22D11/128

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B22D B21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 00 61320 A (BHP STEEL JLA PTY LTD ;ZIEGELAAR JOHN ALBERT (AU); ISHIKAWAJIMA HA) 19 October 2000 (2000-10-19) cited in the application page 6, line 19 -page 7, line 6; figure 3 ---	1,2,4
Y	DE 196 37 545 A (SCHLOEMANN SIEMAG AG) 19 March 1998 (1998-03-19) the whole document ---	1,2,4
A	WO 99 48636 A (HOHENBICHLER GERALD ;PELLISSETTI STEFANO (AT); SCHERTLER ARMIN (AT) 30 September 1999 (1999-09-30) abstract; figure 1 --- -/--	1-4

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

12 November 2003

Date of mailing of the international search report

26/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Mailliard, A

INTERNATIONAL SEARCH REPORT

International Publication No.

PCT/EP 03/07301

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 010, no. 081 (M-465), 29 March 1986 (1986-03-29) & JP 60 221103 A (ISHIKAWAJIMA HARIMA JUKOGYO KK), 5 November 1985 (1985-11-05) abstract ---	1-4
A	PATENT ABSTRACTS OF JAPAN vol. 018, no. 115 (M-1566), 24 February 1994 (1994-02-24) & JP 05 309454 A (NIPPON STEEL CORP; OTHERS: 01), 22 November 1993 (1993-11-22) abstract ---	1-4
A	US 3 911 995 A (YU QUIN SHEN) 14 October 1975 (1975-10-14) column 2, line 13 -column 3, line 15; figures 1,2 ---	1-4
A	FR 1 379 973 A (CONCAST AG) 27 November 1964 (1964-11-27) page 2, left-hand column, last paragraph -right-hand column, line 38; figure 1 -----	1-4

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 03/07301

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 0061320	A	19-10-2000	WO 0061320 A1 19-10-2000
		AU 762787 B2 03-07-2003	
		AU 3544900 A 14-11-2000	
		BR 0009635 A 02-01-2002	
		CA 2369223 A1 19-10-2000	
		CN 1358119 T 10-07-2002	
		EP 1177057 A1 06-02-2002	
		JP 2002540953 T 03-12-2002	
		NZ 514526 A 28-03-2003	
		TW 476675 B 21-02-2002	
		ZA 200108152 A 11-06-2002	
DE 19637545	A	19-03-1998	DE 19637545 A1 19-03-1998
WO 9948636	A	30-09-1999	AT 406026 B 25-01-2000
		AT 53498 A 15-06-1999	
		WO 9948636 A1 30-09-1999	
		AT 231760 T 15-02-2003	
		AU 749137 B2 20-06-2002	
		AU 2911299 A 18-10-1999	
		BR 9909664 A 21-11-2000	
		CA 2325477 A1 30-09-1999	
		CN 1294537 T 09-05-2001	
		DE 59904159 D1 06-03-2003	
		DK 1064114 T3 26-05-2003	
		EP 1064114 A1 03-01-2001	
		JP 2002507485 T 12-03-2002	
		PL 343165 A1 30-07-2001	
		ZA 9902287 A 04-10-1999	
JP 60221103	A	05-11-1985	NONE
JP 05309454	A	22-11-1993	JP 3016645 B2 06-03-2000
US 3911995	A	14-10-1975	AR 193758 A1 22-05-1973
		AT 326851 B 12-01-1976	
		AT 842172 A 15-03-1975	
		AU 461040 B2 15-05-1975	
		AU 4694672 A 28-03-1974	
		BE 789204 A1 22-03-1973	
		CA 957126 A1 05-11-1974	
		DE 2247083 A1 05-04-1973	
		ES 407069 A1 01-11-1975	
		FR 2156612 A1 01-06-1973	
		GB 1410336 A 15-10-1975	
		IT 975135 B 20-07-1974	
		JP 48042924 A 21-06-1973	
		JP 55028777 B 30-07-1980	
		NL 7213170 A 03-04-1973	
		RO 60668 A1 15-12-1976	
		ZA 7206370 A 27-06-1973	
FR 1379973	A	27-11-1964	NONE

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.